





25577


Pump and Play station

Components.:


See diagram to right for main components, also includes, four plastic Hooks, two Pipes, one Pump (with screws to fix x 4), two 3,5x25 Screws (8pce), 4,0X50 screws(6pcs) and 4,0X70 (56pcs). Recommended two person build, and that access to a power Screwdriver required.

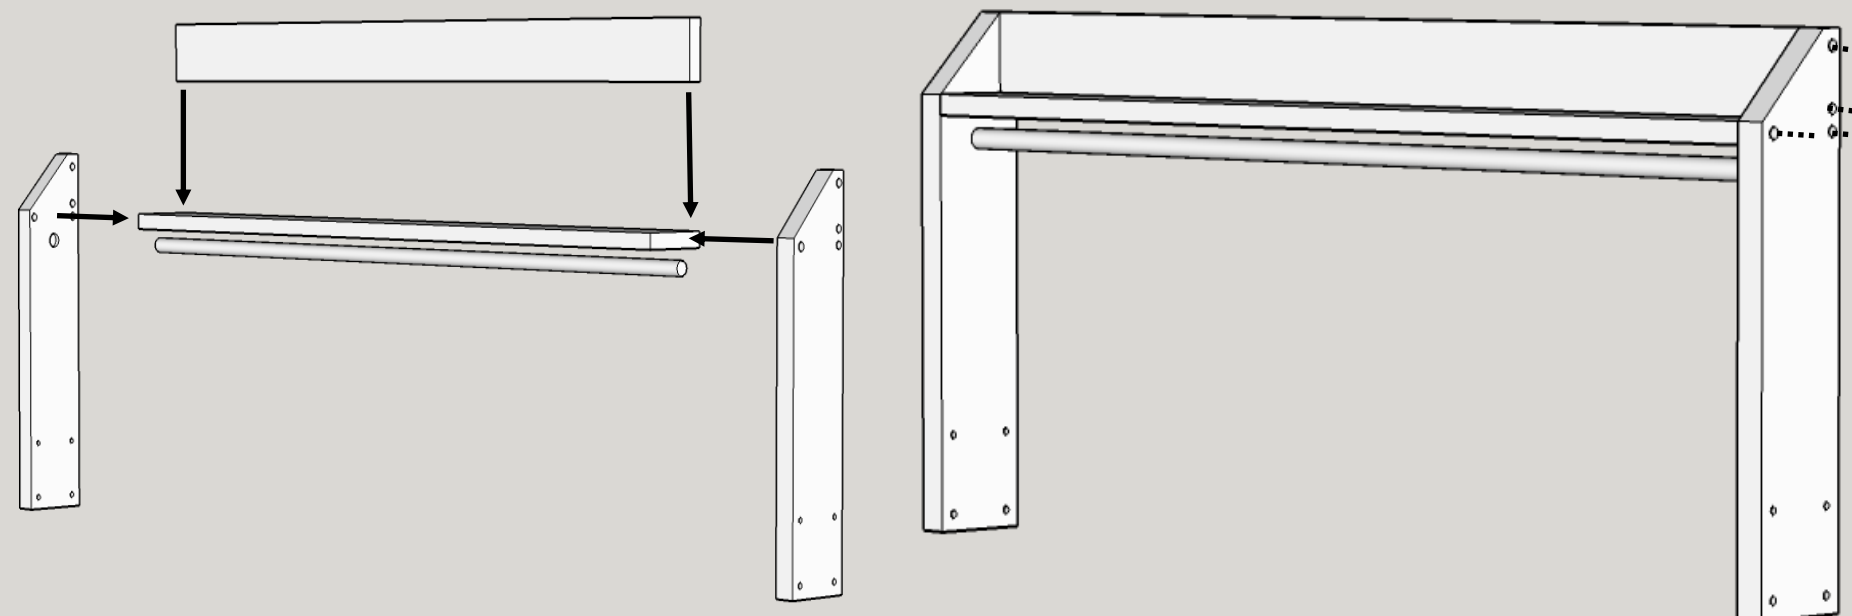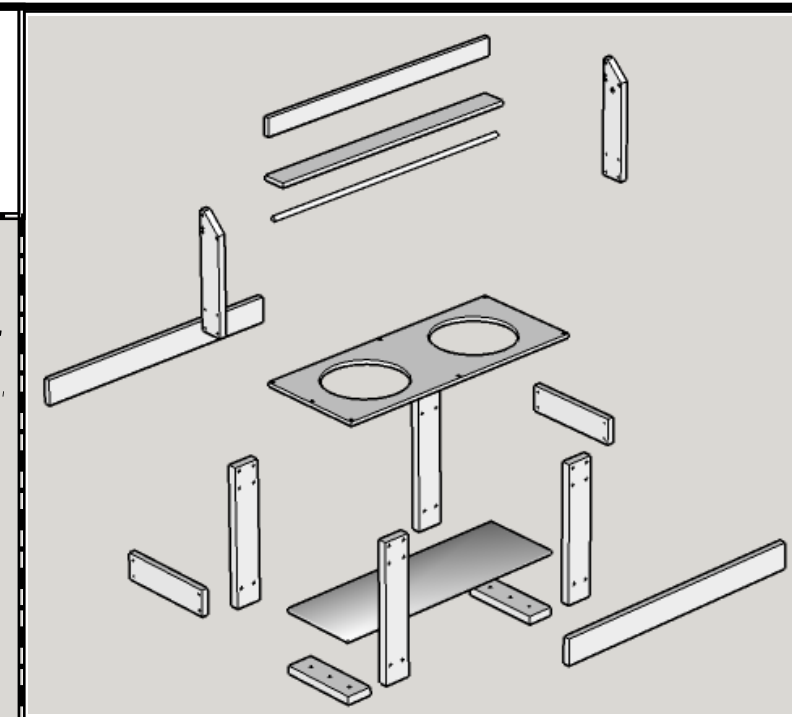


Stage one begin by building the shelves, using eight 4,0x70 screws attach the shelf and its back to the two upright posts, the pole should be inserted into the hole before the second end is screwed in place.

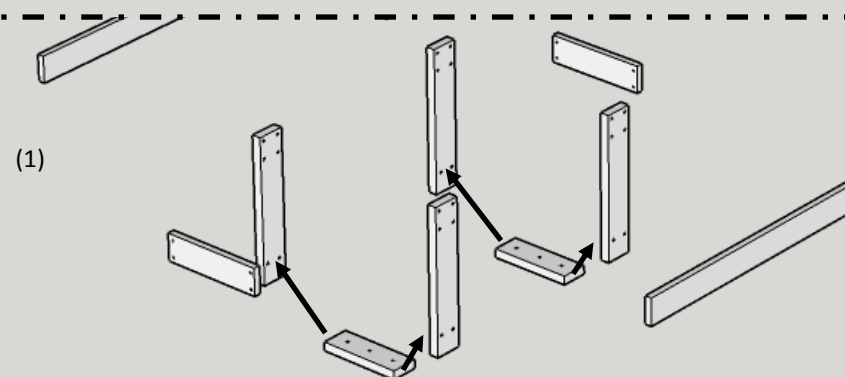

(1)

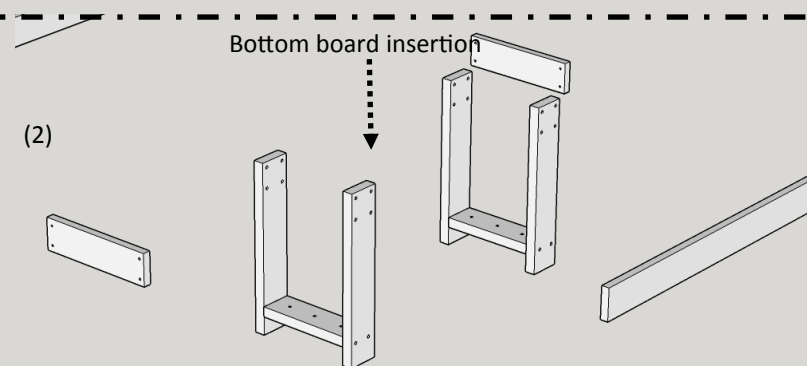


(2)

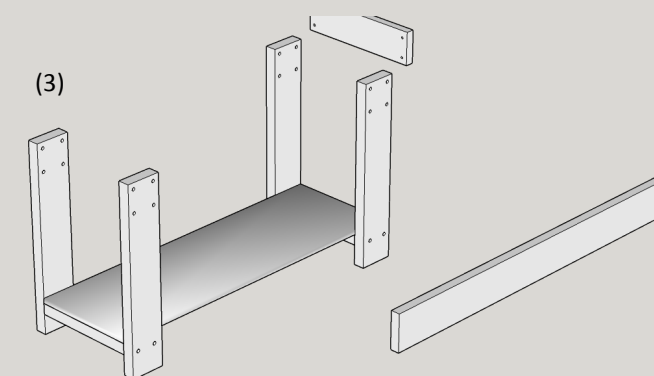


(3)


1. Screw the component to the legs using two of the 4,0x70 screws per leg.
2. Using the six 4,0x50 screws. Attach the bottom most board between the legs, the assembly should look similar to the image in (3)
3. The two long boards need attaching to the top of the legs. These are mounted on the outside of the product and the screws are driven in from the inside, (nb you must leave enough of an overhang for the end pieces to fit into position to help, it is recommended that you use one as a guide to where you need to mount the long boards) . Once done the assembly should resemble the image in (4)

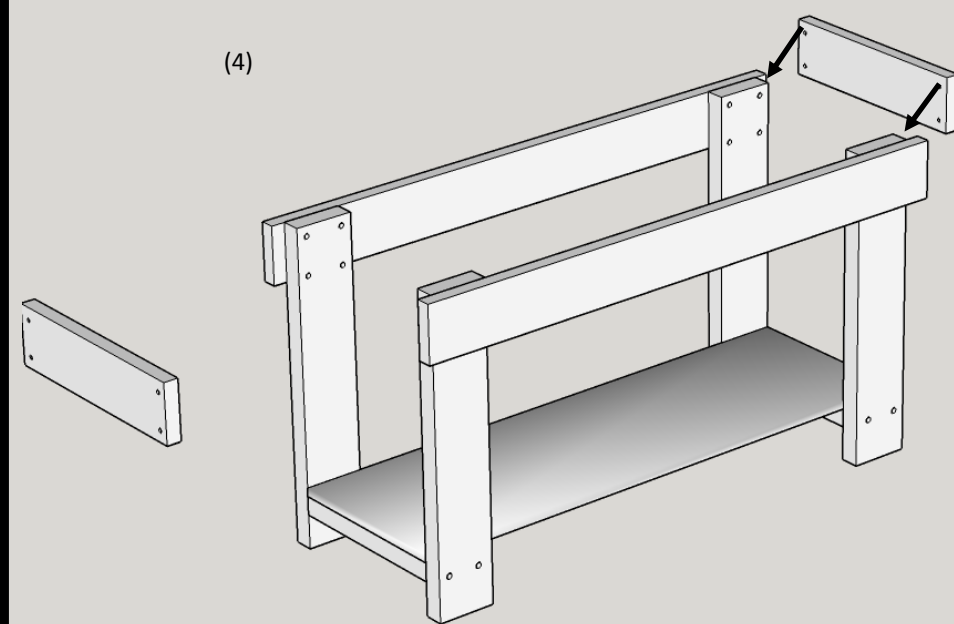


(5a)

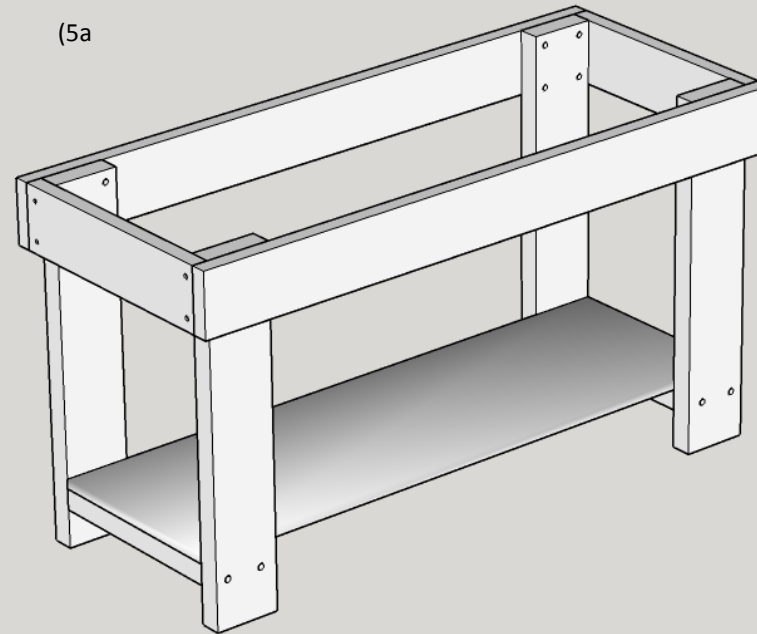

(5b)

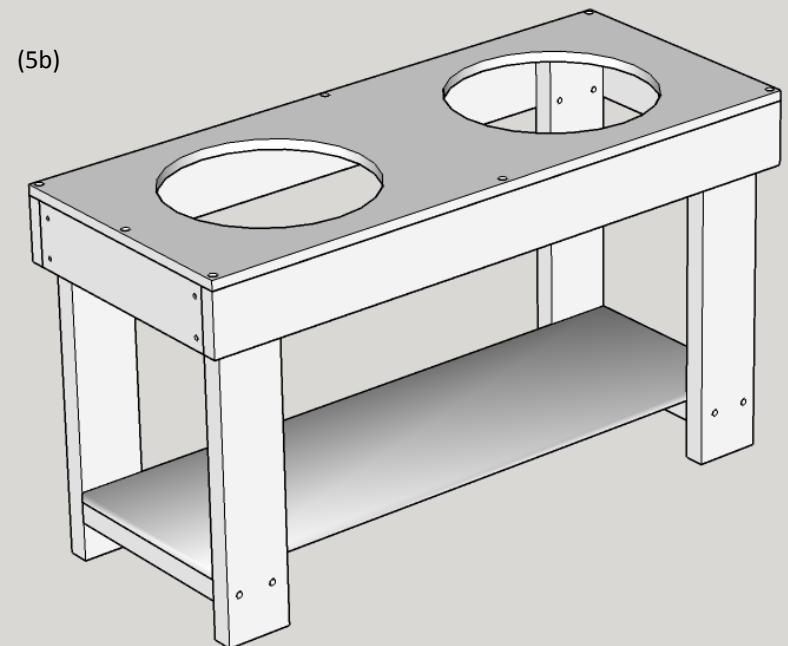

(6)

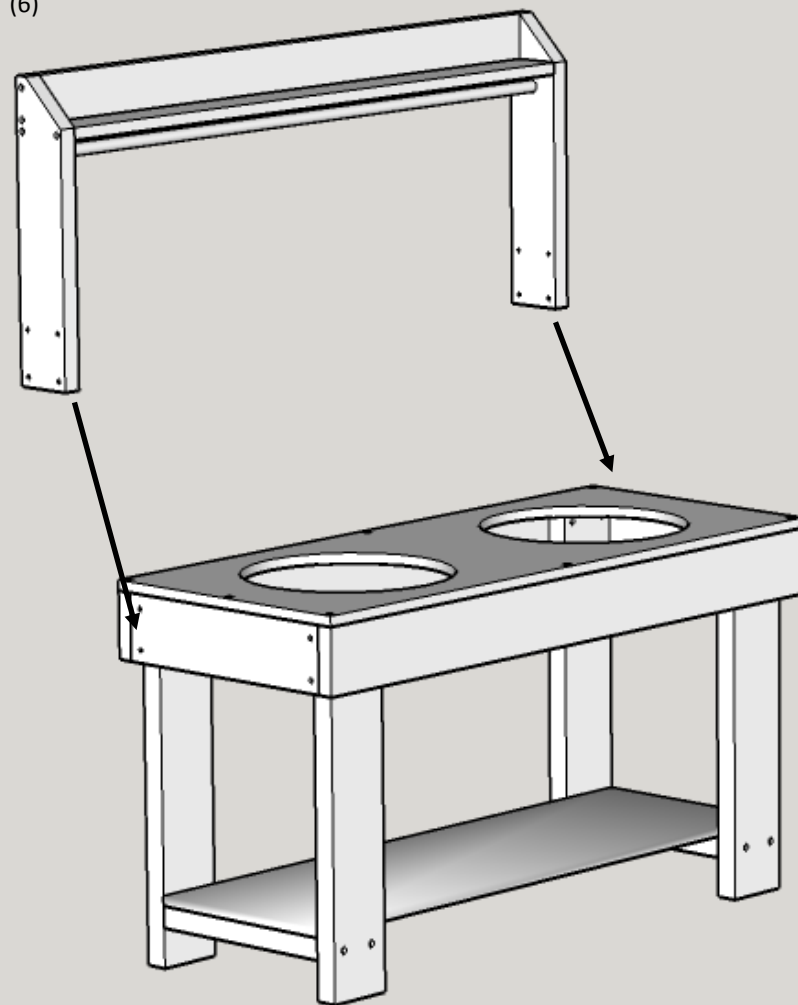


4. Mount the two small side panels and secure with 4,0x70 Screws there are four per panel. Use the pilot holes provided.
5. Lower the worktop the board with two holes in place. There are eight pilot holes to secure the board in place, use 4,0x70 screws.
6. Bring the shelf assembly you built earlier and secure to the side indicated by the arrow, the back should be flush with the back of the table and the bottom edge flush with the bottom edge of the short panel. For additional guidance note the position in (7)
7. The hooks attach to the sides as indicated with the dashed lines there should be two each side. Use screws 3,5x25 (8pce)

The pump attaches two the upright of the shelf section using the 4 screws included with the pump. Position pump on symbol. The soft pipe that is supplied with the product attaches with the narrow end to the two pipe connectors on the pump this is quite a tight fit but is needed for a good seal.

NB The pipe that draws water from the barrel, may need threading up through the lid of the barrel first.

(7)

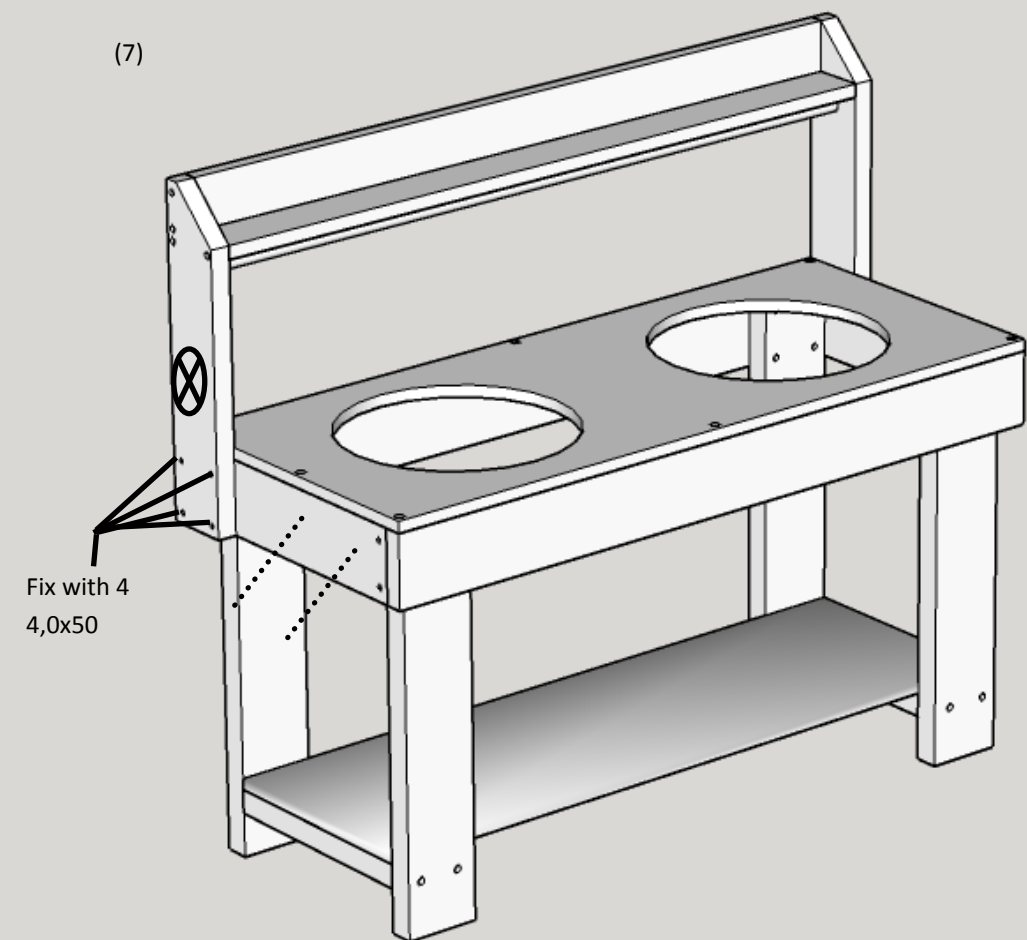

Fix with 4
4,0x50

Email us your  Ideas
ideas@cosydirect.com

We would love to hear your feedback on our assembly instructions. Also if you have any problems assembling our products then don't hesitate to ask Al:

alastair@cosydirect.com