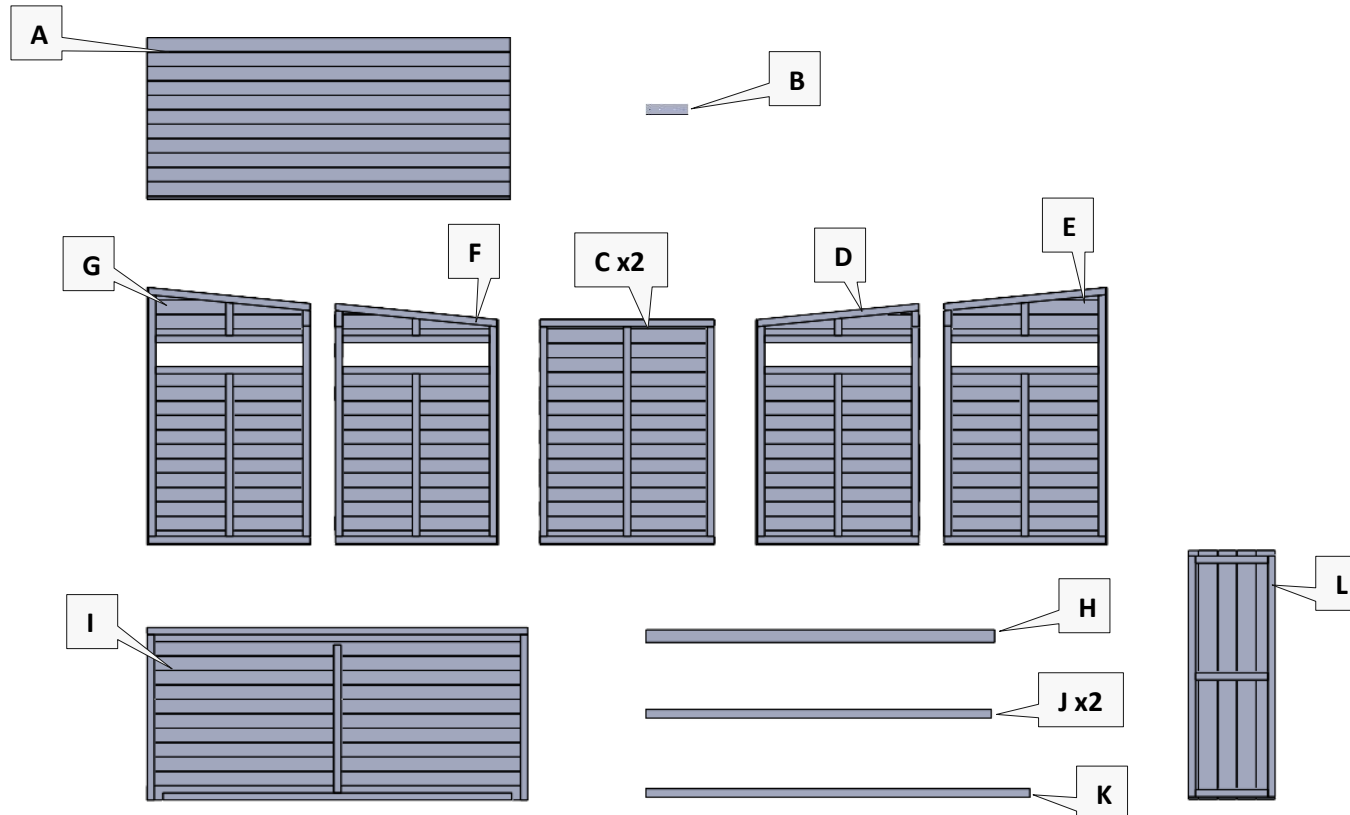


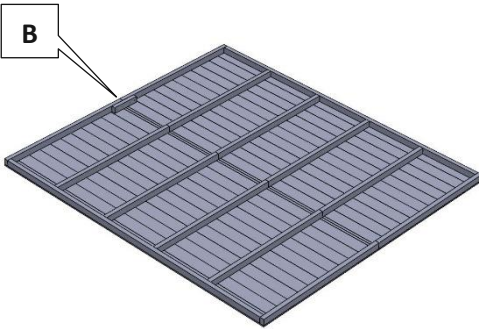
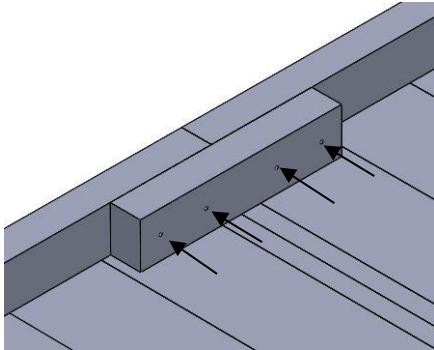
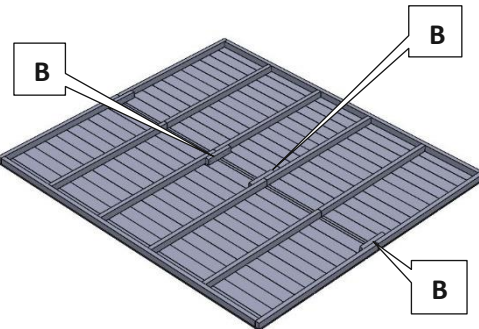
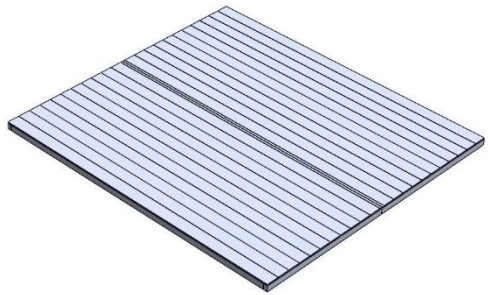
# 35737 – Closed Forest Cabin

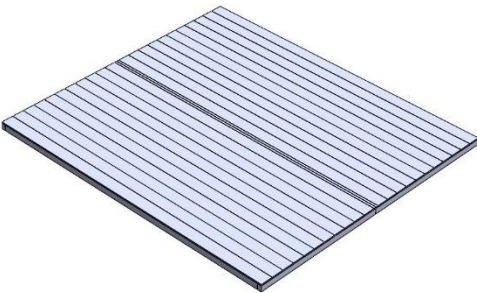
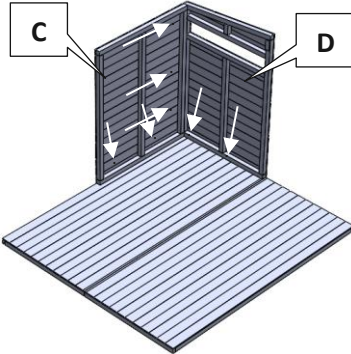
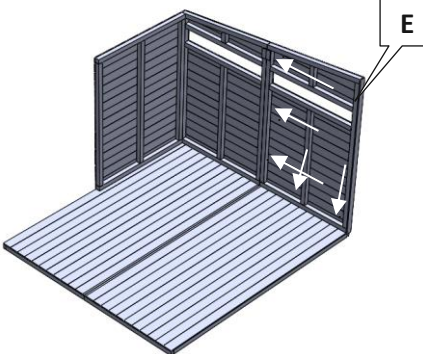
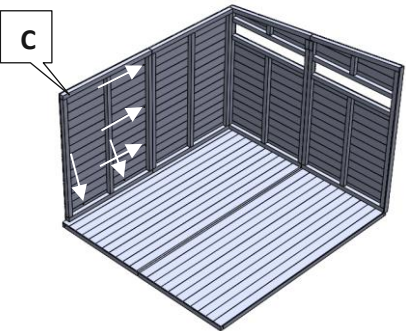
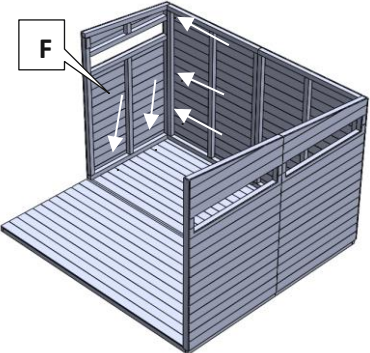
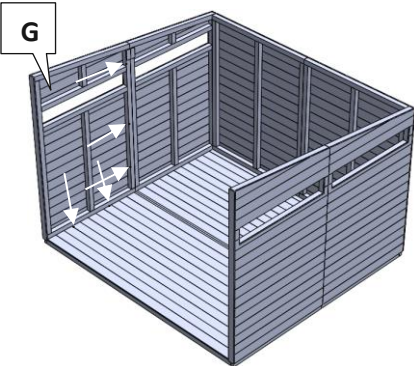
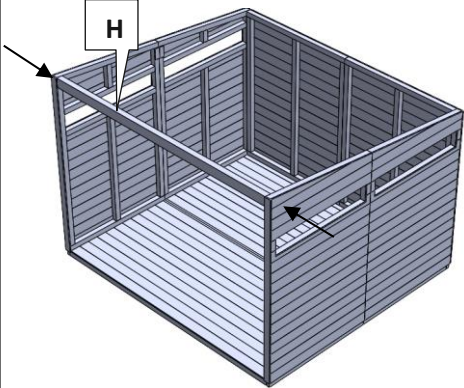
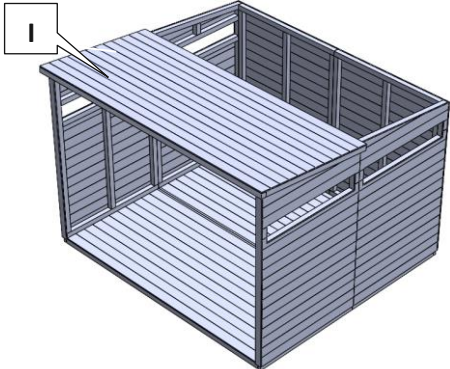
## Assembly Instructions

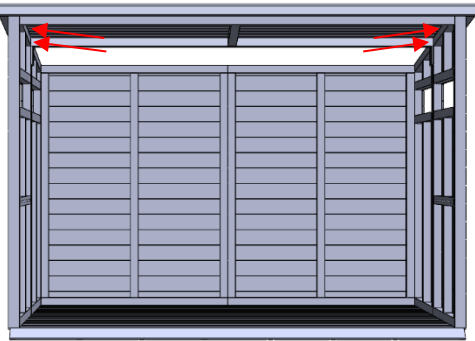
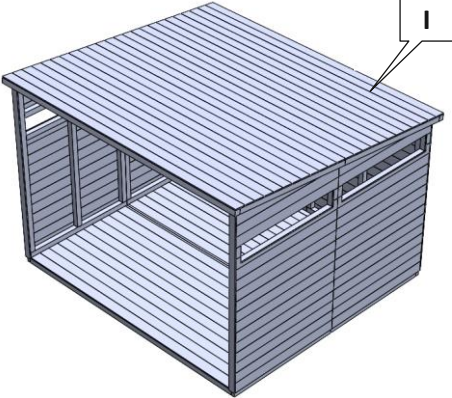
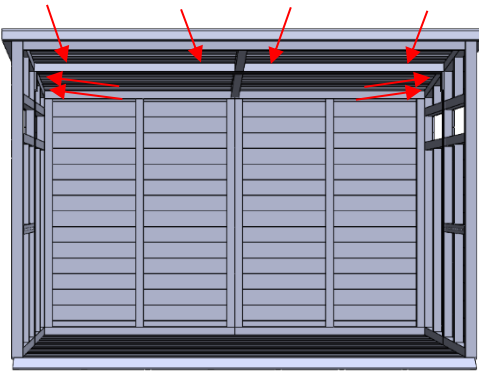
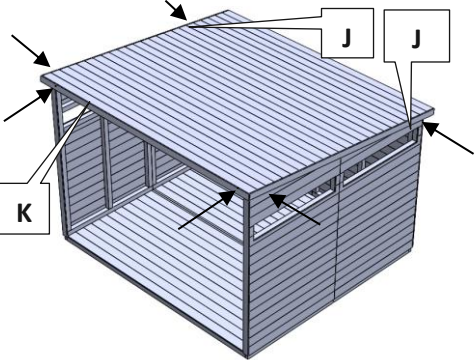
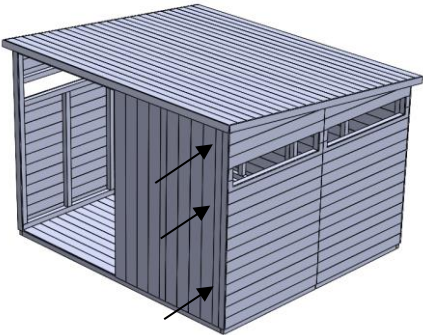
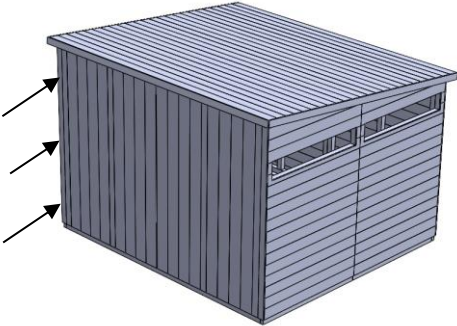
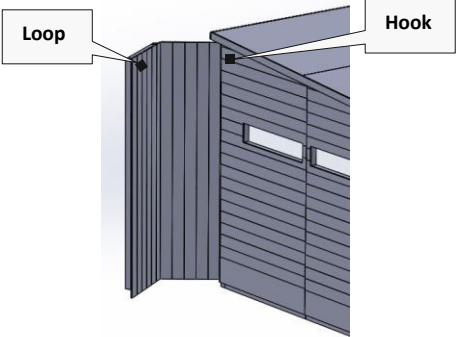
| Components: | Part | Name              | Qty | Part | Name              | Qty | Part | Name              | Qty | Part | Name                     | Qty |  | Tools Required |
|-------------|------|-------------------|-----|------|-------------------|-----|------|-------------------|-----|------|--------------------------|-----|--|----------------|
|             | A.   | Base Front        | 2   | B.   | Base Block        | 4   | C.   | Back Panel        | 2   | D.   | RH Back Panel            | 1   |  | Electric Drill |
|             | E.   | RH Front Panel    | 1   | F.   | LH Back Panel     | 1   | G.   | LH Front Panel    | 1   | H.   | Cross Bar                | 1   |  | PZ2 Driver Bit |
|             | I.   | Roof Panel        | 2   | J.   | Side Roof Fascia  | 2   | K.   | Front Roof Fascia | 1   | L.   | Door (2 hinged together) | 2   |  | Hammer         |
|             | M.   | 80mm Screws       | 43  | N.   | 30mm Screws       | 12  | O.   | 50mm Screws       | 34  | P.   | Cabin Hooks              | 2   |  | Stanley Knife  |
|             | Q.   | Bag of Felt Tacks | 1   | R.   | Roll of Roof Felt | 1   |      |                   |     |      |                          |     |  |                |

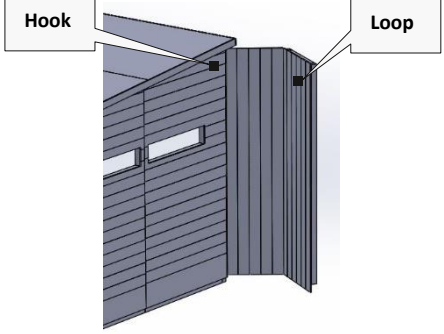
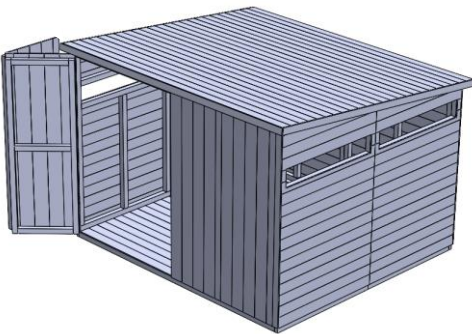


1. Check you have all the components. Two-person assembly.

|                                                                                    |                                                                                    |                                                                                     |                                                                                     |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|   |  |  |  |
| <p>2. Position both parts A as shown.</p>                                          | <p>3. Position part B as shown.</p>                                                | <p>4. Fix in place using 4x 50mm screws as indicated.</p>                           | <p>5. Repeat steps 3-4 with remaining parts B.</p>                                  |
|  |                                                                                    |                                                                                     |                                                                                     |
| <p>6. Flip the completed base over.</p>                                            |                                                                                    |                                                                                     |                                                                                     |

|                                                                                      |                                                                                              |                                                                                      |                                                                                      |
|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|     |            |   |   |
| <p>7. Position the base on a flat level surface.</p>                                 | <p>8. Position parts C &amp; D as shown. Fix in place using 7x 80mm screws as indicated.</p> | <p>9. Position part E as shown. Fix in place using 5x 80mm screws as indicated.</p>  | <p>10. Position part C as shown. Fix in place using 5x 80mm screws as indicated.</p> |
|    |           |  |  |
| <p>11. Position part F as shown. Fix in place using 5x 80mm screws as indicated.</p> | <p>12. Position part G as shown. Fix in place using 5x 80mm screws as indicated.</p>         | <p>13. Position part H as shown. Fix in place using 4x 80mm screws.</p>              | <p>14. Position part I as shown.</p>                                                 |

|                                                                                                |                                                                                     |                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|               |   |   | <ul style="list-style-type: none"> <li>• Apply roof felt, starting at the back edge and working up to the front edge.</li> <li>• Allow overhang at the sides and back.</li> <li>• Using felt tacks provided and fix every 8-10cm ensuring that there is a 15cm overlap between sheets.</li> <li>• Fold the felt over all edges and fix in place every 8-10cm.</li> <li>• Using a Stanley knife carefully trim off the excess felt.</li> </ul> |
| <p>15. Fix in place using 4x 80mm screws as indicated.</p>                                     | <p>16. Position part I as shown.</p>                                                | <p>17. Fix in place using 8x 80mm screws as indicated.</p>                           | <p>18. Felt the roof.</p>                                                                                                                                                                                                                                                                                                                                                                                                                     |
|              |  |  |                                                                                                                                                                                                                                                                                                                                                           |
| <p>19. Position parts J &amp; K as shown. Fix in place using 12x 30mm screws as indicated.</p> | <p>20. Position a set of doors as shown. Fix in place using 50mm screws.</p>        | <p>21. Repeat step 15.</p>                                                           | <p>22. Screw the cabin hook to the shed side as indicated &amp; the loop to the door as indicated.</p>                                                                                                                                                                                                                                                                                                                                        |

|                                                                                                        |                                                                                    |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                       |  |
| <p>23. Screw the cabin hook to the shed side as indicated &amp; the loop to the door as indicated.</p> | <p>24. Done.</p>                                                                   |

Email us your Bright  Ideas  
[ideas@cosydirect.com](mailto:ideas@cosydirect.com)

# Shed & Shelter

*This information is only provided as guidance. You should always satisfy yourself the product is completely safe to use in your environment with a full safety assessment.*

## Safety Information

For safety, please ensure that your shed/shelter is sited on solid, stable, flat, hard standing ground. We also recommend that you site it against a wall, building or fence and secure it in place to reduce any chance of severe weather tipping or damaging the shed/shelter.

Sheds and shelters are heavy items and must be moved and handled correctly when building and siting them. They should be moved by at least two people using best practice manual handling techniques and procedures.

To help avoid falls and damaging your shed/shelter please ensure children and adults do not climb on the shelves, clamber up the shed sides, stand on top of the shed/shelter, swing on the doors or use the shed/shelter in any way that puts themselves or others at risk of harm. Ensure its use is always well supervised.

Please note:

Sheds & shelters can be prone to changes in appearance and shape, especially in extreme weather conditions. These will not affect the structural integrity of the product; this is a natural feature.

- Site the product on hard, level ground with good drainage such as tarmac, concrete or paving.
- If you are fixing your shed or shelter to a wall or fence; please make sure that any holes made are treated, that there is a gap left at the back for water to drain off the roof and that you don't pierce the felted areas.
- Heavy items should be stored on the bottom level of the shed/shelter to keep the centre of mass low in line with good health and safety approaches to the storage of resources and manual handling.
- Ensure that the shed/shelter is not positioned under or next to trees, bushes or foliage.
- Do not store wet items in the shed/shelter without appropriate ventilation or moisture control.
- The treatment on the shed/shelter MUST be re-applied every year. You can do this by purchasing a good non-toxic stain and applying it liberally to the outer panels of your shed.
- If the blackboard paint begins to deteriorate, you can refresh this by sanding off the spoiled paint and reapplying over this area. You can purchase this paint directly from Cosy or any respectable hardware retailer.
- For any self-assembly sheds/shelters, ensure that it is fully and correctly assembled by following the instructions that are provided with the item. Please contact Cosy if you do not receive these instructions prior to assembly as Cosy is not liable for damage caused by incorrect assembly. Small parts such as screws, rivets, nuts, bolts and washers need regular checks to ensure they are securely in place as part of your care and maintenance routines.



- If your shed/shelter has doors, ensure that at the end of each session, the doors are completely closed with all latches used where applicable to help lessen any warping over time.